


MURAL FLAIR PLUS



2.0/2.5/3.5/4.2/5.0/7.1kW

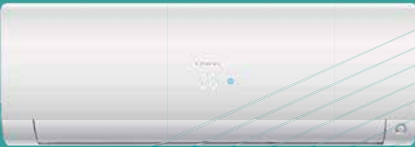

YR-HE



Super silencioso



Controlo por WiFi



Insuflação de Ar 3D



Self-clean



UNIDADE INTERIOR			AS20S2SF2FA-3	AS25S2SF2FA-3	AS35S2SF2FA-3	AS42S2SF2FA-3	AS50S2SF2FA-3	AS71S2SF2FA-3
Capacidade	Arrefecimento Nom.	kW	2	2.6(0.8-3.2)	3.5(1.0-4.0)	4.2(1.2-4.8)	5.2(1.4-6.0)	7(2.2-7.5)
	Aquecimento Nom.	kW	2.5	3.2(0.8-4.2)	4.2(1.0-5.2)	4.4(1.3-5.8)	6.0(1.4-6.9)	8(2.4-8.5)
Parâmetros Eléctricos	Alimentação	Ph/V/Hz	1/230/50	1/230/50	1/230/50	1/230/50	1/230/50	1/230/50
Performance	Insuflação	m³/h	600	600	650	750	900	1100
	Nível de Potência Sonora	dB(A)	53	53	55	58	57	60
	Nível de Pressão Sonora	dB(A)	38/32/25	38/32/25	39/33/26	42/36/30	45/41/37	47/43/37
Instalação	Dimensões exteriores	mm	870/196/301	870/196/301	870/196/301	870/196/301	1009/223/327	1126/230/337
	Dimensões de Embalagem	mm	952/283/389	952/283/389	952/283/389	952/283/389	1100/314/420	1187/301/417
	Peso liq/bruto	kg	9.5/12	9.5/12	9.5/12	9.5/12	12/15	15.2/18.2
	Tubagem Liq.	mm	6.35	6.35	6.35	6.35	6.35	9.52
	Tubagem Gas	mm	9.52	9.52	9.52	9.52	12.7	15.88
	Comando	standard	YR-HE	YR-HE	YR-HE	YR-HE	YR-HE	YR-HE
		optional	/	/	/	/	/	/

*Data is pending;